




SERIAL CONNECTION OF ETA OB-/ OE-SERIES DC/DC CONVERTERS

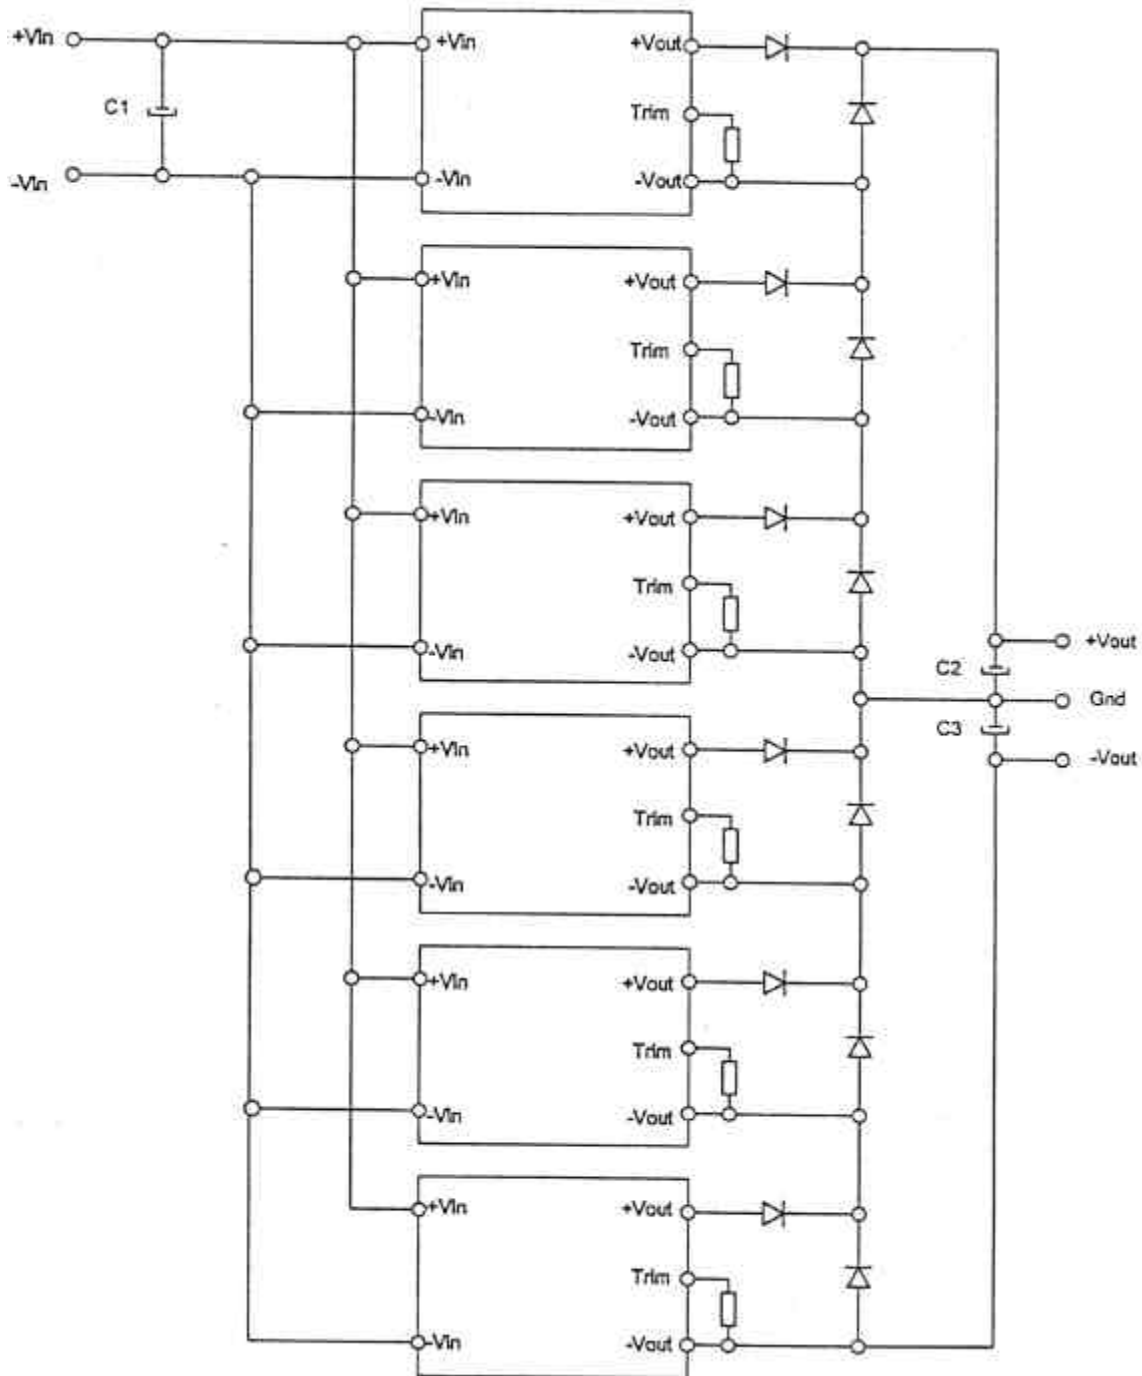

REMARKS ABOUT SERIAL CONNECTION OF OB-SERIES:

- Capacitors: C1, C2, C3: 1'000 μ F min. (low impedance)
- Diodes: Shottky- or fast recovery types adapted to clamp voltage and current
- Resistors: 0.25W types, to compensate voltage drop over diodes